

AMG-2000

Series



Entry Station



The AMG-2000 Series Entry Station is designed for multiple uses, typically at the unattended entrances of a parking facility. The AMG-2010 Series Entry Station dispenses a mag-stripe parking ticket. The AMG-2050 Series Entry Station adds access cards and credit card functionality such as ticket in/credit card out, and credit card in/credit card out when used with an AMG-6050 Series Exit Station.


Entry Station

AMG-2000

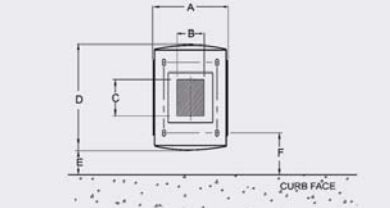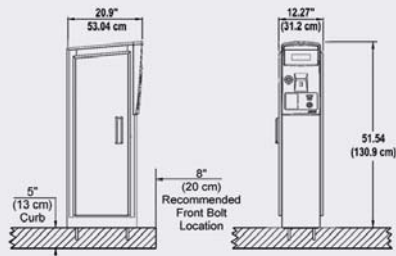

A = 12.27" (31.2 cm) **C** = 8" (20.32 cm) **E** = 5" (13 cm)
B = 4" (10.16 cm) **D** = 20.9" (53.04 cm) **F** = 8" (20 cm)

* RECOMMENDATION ONLY. INSTALLATION REQUIREMENTS MAY VARY.



G = 7.48" (19.0 cm)
H = 11.75" (29.8 cm)

FEATURES

- ▶ **Standalone (AMG-2010 series) or on-line (AMG-2010 and AMG-2050 series)**
- ▶ **Uses common hardware components (RWPV-based) for fewer inventoried parts and reduced service training**
- ▶ **Field programmable operation utilizing handheld wireless remote control**
- ▶ **Accommodates credit card size mag-stripe media**
- ▶ **Mag-stripe access card / credit card acceptance (AMG-2050 series) models optional**
- ▶ **Proximity Technology Reader Integration (AMG-2050 series) models optional**
- ▶ **Integrated intercom**
- ▶ **Personalized panel option Std. panel – "Welcome"**
- ▶ **Dual powdercoat finish**

REPRESENTED BY:



**VICTOR
LIBERATOR**

TIME SYSTEMS, INC.

40 Gardenville Parkway, Buffalo NY 14224
 Phone: (716) 656-5700 Fax: (716) 656-2099
 Website: www.liberatortime.com

SPECIFICATIONS

COMPLIANCE

CISP (Cardholder Information Security Program) compliant.
 AMG-2050 ExpressParc® lane equipment does not store credit card data.
 Meets ADA (Americans with Disabilities Act) and ANSI (American National Standards Institute) requirements.

ELECTRICAL

120V AC, 60 HZ
 220/240V AC, 50/60 Hz
 10 amp max. (120V) 5 amp max. (240V)
 Multiple I/O capability for ticket tracking, counts and monitoring

MECHANICAL

Automatic dual ticket feed; dot matrix printer; cartridge ribbon; exclusive RWPV™ (read, write, print and vault) mag-stripe mechanism

TIME CONTROL

Real-time clock synchronization with host computer
 Built-in crystal controlled perpetual calendar
 Programmable Daylight Saving Time adjustment

ENVIRONMENT

Temperature: -20°F ~ 120°F (-29°C ~ 49°C)
 Automatic thermostat-controlled heater included
Humidity: 10% ~ 95% (non-condensing)

HOUSING

Heavy-duty, 14 gauge steel construction, weather gasketing, lockable door.
Dimensions: 51.54"H x 12.27"W x 20.9"D (130.9 cm x 31.2 cm x 53.04 cm)
Ticket throat: 38-3/4" (98 cm)
Weight: 135 lbs. (61 kg)
Finish (Standard): Grey Classic (#314) / Argento Metallic (#305);
 White (RAL#9010); custom color available

PRINTER

Large (7 x 9 dot pattern) dot matrix printer
 Prints date and time (12 & 24-hour format), ticket number, machine number and rate
 Marks and voids retracted tickets
 Self sharpening cutter blade

TICKETS

Uses fanfold tickets: 5,000 tickets/carton. Holds two cartons.
 Credit card size tickets: 2-1/8" x 3-3/8" (5.41 cm x 8.59 cm)

OPTIONS

2nd I/O Rack (passcard readers lockout)
 Magstripe and proximity access card models optional

INTERCOM

Aiphone™ LEF series intercom system
 Standard user recordable voice announcement

*Manufactured by Amano Cincinnati, Inc.'s Ohio factory, an ISO 9001:2000 registered facility.
 Specifications are approximate and are subject to change without notice.
 UL approval does not apply to 220/240V AC, 50/60 Hz*



AMANO McGANN®

Corporate Headquarters 651 Taft Street NE, Minneapolis, MN 55413
 Tel: (612) 331-2020 www.amanomcgann.com